

**DESCRIPTION**

The MS3711A is a slim, plug-in pulse divider that accepts pulse train signals from sensors or other devices, shapes and divides these pulses, converts signal levels as necessary, and provides isolated single or dual output.

**ORDERING CODE**

**MS3711A** -  -

**Model** \_\_\_\_\_

**Power Supply** \_\_\_\_\_

**A:** 100 to 240V AC (50 to 60Hz)  
**D:** 24V DC                      **P:** 100 to 240V DC

**Input** \_\_\_\_\_

**O:** Dry contact or open collector  
(Pull-up: Approx. 13V, 3.3kΩ)  
**A:** AC voltage pulse  
(Threshold voltage: Approx. 0.06V<sub>p-p</sub>)  
**D:** DC voltage pulse  
(Threshold voltage: Approx. 2V)  
**I:** 4 to 20mA DC pulse  
(Threshold current: Approx. 8mA)  
**Y:** Other input signal and/or threshold voltage

**Output 1** \_\_\_\_\_

**1:** TTL level  
**2:** Open collector  
**3:** Voltage pulse 10V±10%  
**4:** Voltage pulse 12V±10%


**Output 2** \_\_\_\_\_

**No code:** None  
**The codes are the same as for Output 1.**

Note: When a combination of TTL levels or voltage pulses is selected for Outputs 1 and 2, the voltage levels for both outputs should be the same.

**Options** \_\_\_\_\_

**No code:** None  
**/A:** Sensor power supply: 24V DC (±10%), 2-wire type  
**/B:** Sensor power supply: 12V DC (±10%), 2-wire type  
**/C:** Sensor power supply: 24V DC (±10%), 3-wire type  
**/D:** Sensor power supply: 12V DC (±10%), 3-wire type  
**/H:** Polyurethane conformal coating  
**/X:** Others (Special order)  
\* For non-standard options, ask MTT for availability.


**ORDERING INFORMATION**

To place an order, please use the ordering code format as shown on the left.  
(e.g.) MS3711A-A-O22

\* With the default setting, the division ratio is 1/1.

**Other Ordering Examples:**  
For an input code of "Y": MS3711A-A-Y22 (Input DC voltage pulse: 0 to 12V / SH=8.5V, SL=2.5V)  
For an input code of "Y": MS3711A-A-Y22 (Input AC pulse: 200V<sub>p-p</sub> / S= 2V<sub>p-p</sub>)  
For a specific division ratio: MS3711A-A-O22 (Division ratio: 1/100)  
\* SH = Threshold level Hi, SL = Threshold level Lo, S = Threshold level  
**Note 1:** When a DC current pulse is selected for input, the range should be specified between 0-100µA and 0-100mA.  
**Note 2:** If you wish to include multiple options in your order, specify the option codes in series (e.g. /AX).

**SPECIFICATIONS**
**POWER SECTION**

<b>Power Requirements</b>	100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC±10% 100 to 240V DC: 85 to 264V DC		
<b>Power Sensitivity</b>	Better than ±0.1% of span for each power supply range.		
<b>Power Line Fuse</b>	160mA fuse is installed (standard).		
<b>Power Consumption</b>			
<b>Power</b>	100-240V AC	24V DC	100-240V DC
<b>Single Output</b>	5.0VA max	2.1W max	7.2W max
<b>Dual Output</b>	5.5VA max	2.2W max	7.2W max

**INPUT SECTION**

<b>Input Resistance</b>		
Voltage Input Model	With power:	1MΩ min. (Standard, 5V input)
	Without power:	10kΩ min.
Current Input Model	250Ω (Standard for 4 to 20mA)	
Note: When a 2-wire type sensor power supply is specified, a shunt resistor of 100Ω is used.		
<b>Allowable Input Voltage</b>		
DC Voltage Input Model	30V DC max., continuous.	
DC Current Input Model	40mA DC max., continuous.	
AC Voltage Input Model	200Vp-p AC max., continuous (up to ±100V with reference to 0V).	
Maximum Input Frequency	100kHz	
Input Pulse Width	10μs min.	
Duty Ratio	40 to 60% (at standard threshold voltage)	
Sensor Power Supply	30mA max. (2-wire or 3-wire type)	
<b>Ranges Available</b>		
	AC Voltage Pulse	DC Voltage Pulse
Input Range	-300 to 300V	0 to 300V
Input Voltage Span	0.1 to 600Vp-p	1 to 300V
Input Bias	N/A	0 to +300%
Threshold Voltage	50mVp-p min.	Hi-Lo voltage: 0.2V min.
Input Spec. Ex.: For 10 to 15V DC voltage pulse input, the input voltage span is 5V and the bias +200%.		

**OUTPUT SECTION**

<b>Allowable Output Load</b>		
TTL Level	5mA @ 3.5V	
Voltage Pulse 10V	7mA @ ±10%	
Voltage Pulse 12V	7mA @ ±10%	
Maximum Rating	Open collector: 30V, 50mA	
Division Ratio	1/1 to 1/10000	
Division ratios can be set using the four 10-position rotary switches on the front panel.		
Assuming that these four switches are set to a, b, c and d as shown below, a 4-digit number “n” is expressed as follows:		
$n = a \times 10^3 + b \times 10^2 + c \times 10^1 + d \times 10^0$		
where a, b, c and d are variables, each of which takes any of the numbers 0 to 9.		
Dividing 1 by (n+1) gives a division ratio.		
Duty Ratio	40 to 60% (Input pulse duty ratio 50%, standard threshold voltage)	
Note that the duty ratio will be 30 to 70% only when the division ratio is 1/3.		
DC voltage pulse: 0-5V/1kHz input		
AC voltage pulse: 5Vp-p/1kHz input		
Open collector: 1kHz input		

Division Ratio	Switch Setting			
	×10 <sup>3</sup>	×10 <sup>2</sup>	×10 <sup>1</sup>	×10 <sup>0</sup>
1/n+1	a	b	c	d
1/1	0	0	0	0
1/100	0	0	9	9
1/10000	9	9	9	9

<b>Maximum Output Frequency</b>	
Voltage Pulse Output	100kHz
Open Collector Output	50kHz (Load resistance 1kΩ max.)
(For both of the above, the conditions are as follows: input pulse duty ratio 50% and standard threshold voltage)	

**PERFORMANCE**

Isolation	4-way isolation between input, output 1, output 2, and power.
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
Dielectric Strength	Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C


**PHYSICAL**

Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-proof screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 × H86 × D125 mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

**MATERIAL**


Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2μm gold plating
Printed Circuit Board	Glass fabric, epoxy resin (FR-4: UL 94V-0)

**TERMINAL ASSIGNMENTS**

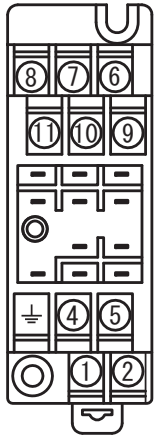


①	P (+)	POWER
②	N (-)	
③	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	+ INPUT	
⑩	- INPUT	
⑪	EX	


**BLOCK DIAGRAM**

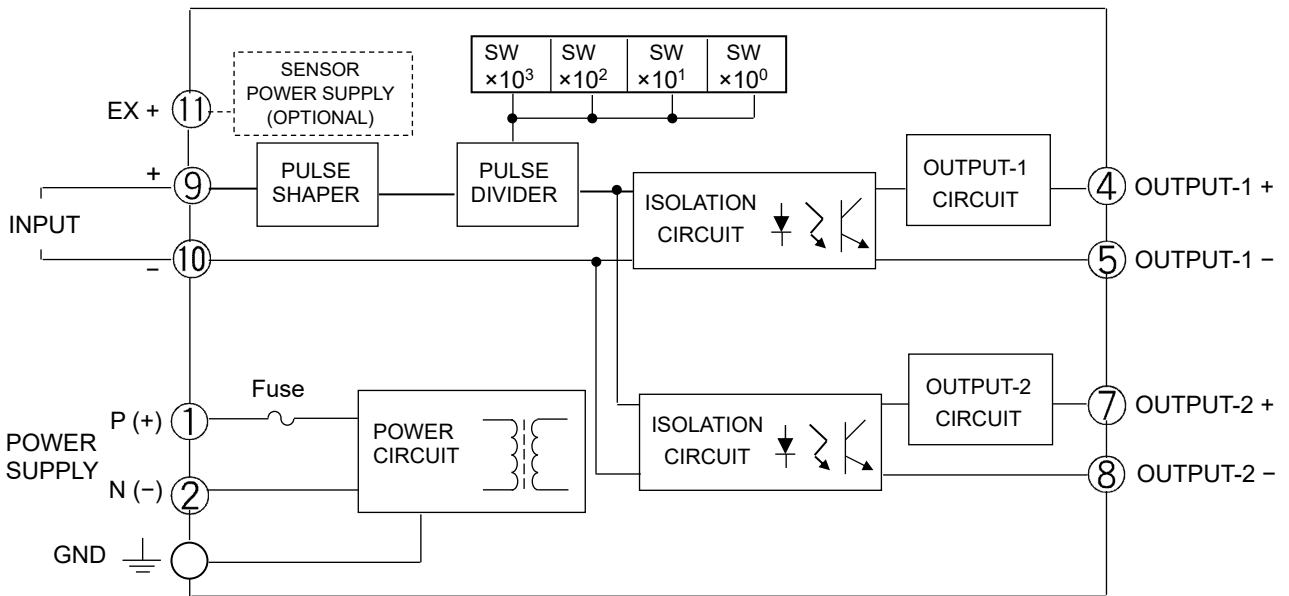

For dry contact or open collector input:

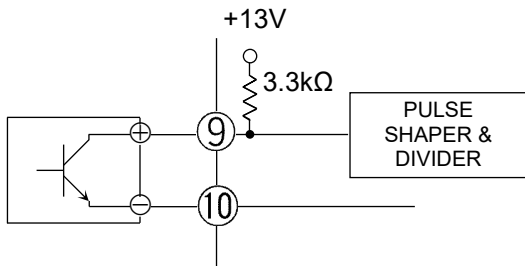

For voltage pulse input:

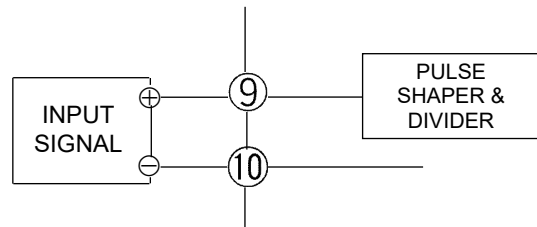

When a 2-wire sensor is used:

Note: The connections may vary with the type of the sensor used.

