

**DESCRIPTION**

The MS3739 is a slim, plug-in ratio/bias converter (output bias model) that converts the ratio and bias of DC current or voltage signals and provides isolated single or dual output.

**ORDERING CODE**

**Model** **MS3739** - ☐ - ☐ ☐ ☐

**Power Supply** ☐  
**A:** 100 to 240V AC (50 to 60Hz)  
**D:** 24V DC **P:** 100 to 240V DC

**Input** ☐  
**A:** 4 to 20mA DC **3:** 0 to 1V DC  
**B:** 2 to 10mA DC **4:** 0 to 10V DC  
**C:** 1 to 5mA DC **5:** 0 to 5V DC  
**D:** 0 to 20mA DC **6:** 1 to 5V DC  
**E:** 4 to 20mA DC\*1 **4W:**  $\pm 10$ V DC  
**H:** 10 to 50mA DC **5W:**  $\pm 5$ V DC  
**Z:** Other DC current signals **0:** Other DC voltage signals

\* 1: Shunt resistor 50 $\Omega$


**Output 1** ☐  
**A:** 4 to 20mA DC **1:** 0 to 10mV DC  
**D:** 0 to 20mA DC **2:** 0 to 100mV DC  
**Z:** Other DC current signal **3:** 0 to 1V DC  
**4:** 0 to 10V DC  
**5:** 0 to 5V DC  
**6:** 1 to 5V DC  
**3W:**  $\pm 1$ V DC  
**4W:**  $\pm 10$ V DC  
**5W:**  $\pm 5$ V DC  
**0:** Other DC voltage signals

**Output 2** ☐  
**No code:** None  
**The codes are the same as for Output 1.**

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.

Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550 $\Omega$  maximum for Output 1 and 350 $\Omega$  maximum for Output 2.

**Options** ☐  
**No code:** None  
**/L:** Dual current output with high output load  
 \* Not subject to CE approval.  
 (OUT-1: 750 $\Omega$  / OUT-2: 550 $\Omega$ )  
**/H:** Polyurethane conformal coating  
**/X:** Others (Special order)  
 \* For non-standard options, ask MTT for availability.

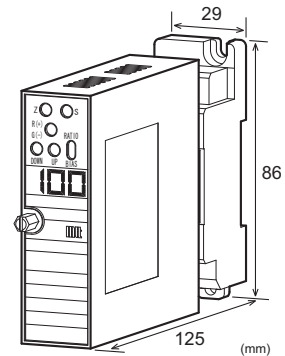
**ORDERING INFORMATION**

To place an order, please use the ordering code format as shown on the left.

(e.g.) MS3739-A-666

\* The factory default settings are:

Positive gain; Ratio = 1; and Bias = 0%.

Other Ordering Examples:

For an input code of "Z": MS3739-A-ZAA (Input: 0.2 to 1V)

For an output code of "0": MS3739-A-A60 (Output: 2 to 5V)

For specific settings (gain/ratio/bias): MS3739-A-666

(Negative gain / Ratio = 2 / Bias = 0%)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /LX).

**SPECIFICATIONS**
**POWER SECTION**

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC±10% 100 to 240V DC: 85 to 264V DC		
Power Sensitivity	Better than ±0.1% of span for each power supply range.		
Power Line Fuse	160mA fuse is installed (standard).		
Power Consumption			
Power	100-240V AC	24V DC	100-240V DC
Single Output	6.0VA max	1.7W max	6.0W max
Dual Output	6.5VA max	2.1W max	7.2W max

**INPUT SECTION**

<b>Input Resistance</b>	
Voltage Input (DC)	With or without power: 1M $\Omega$ min.
Current Input (DC)	4 to 20mA (std.) 250 $\Omega$
	2 to 10mA 250 $\Omega$
	1 to 5 mA 100 $\Omega$
	0 to 20mA 250 $\Omega$
	10 to 50mA 10 $\Omega$

**Allowable Input Voltage**

Voltage Input Model	30V DC max., continuous. (Standard for a span up to 10V)
Current Input Model	40mA DC max., continuous. (Standard for 4 to 20mA)

Ranges Available		
	Current Signal	Voltage Signal
Input Range (DC)	-100 to 100mA	-300 to 300V
Input Span (DC)	100 $\mu$ A <sup>(*)</sup> to 200mA	200mV <sup>(*)</sup> to 600V
Input Bias	-100 to 100%	-100 to 100%
Note: For any input range including negative input signals, the input spans for current and voltage signals range from <sup>(*)</sup> 200 $\mu$ A to 200mA and <sup>(*)</sup> 400mV to 600V, respectively.		
Input Spec. Ex.1: For 3 to 8V input, the input span is 5V and the bias +60%.		
Input Spec. Ex. 2: For -5 to 0V input, the input span is 5V and the bias -100%.		

## ● OUTPUT SECTION

Allowable Output Load		
Voltage Output (DC)	1V span and up	2mA max.
	10mV	10kΩ min.
	100mV	100kΩ min.
Current Output (DC)	4-20mA single output	750Ω max.
	4-20mA dual output	Output 1: 550Ω max.
		Output 2: 350Ω max.
Zero Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)	
Span Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)	
Ratio Setting Range	Positive gain: 0.1 to 4.00 (in steps of 0.01) Negative gain: -0.1 to -4.00 (in steps of 0.01)	
Bias Setting Range	-100 to 100% (in steps of 1%)	
Output Range	Approx. -10 to +120% (1 to 5V DC)	
Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%
Note: For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.		
Output Spec. Ex.1: For 4 to 20mA output, the output span is 16mA and the bias +25%.		
Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.		

## ● PERFORMANCE

Accuracy Rating	Better than $\pm$ 0.2% of span (at 25°C $\pm$ 5°C). Ratio = 1; Bias = 0% (Positive gain) Ratio = -1; Bias = 0% (Negative gain)
Equation	Y = KX + B (Positive gain) Y = KX + B + F (Negative gain) where Y: Output (%) K: Ratio X: Input (%) B: Bias F: 100%
Temperature Effect	Better than $\pm$ 0.15% of span per 10°C change in ambient.

Response Time	85ms max. (0 to 90%) with a step input at 100%.
Ratio/Bias Indicator	Red LED, digit height 8.0mm, 3 digits.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output 1, output 2, and power.
Insulation Resistance	100M $\Omega$ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
Dielectric Strength	Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

## ● PHYSICAL

Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-proof screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 $\times$ H86 $\times$ D125 mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.


## ● MATERIAL

Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2 $\mu$ m gold plating
Printed Circuit Board	Glass fabric, epoxy resin (FR-4: UL 94V-0)

## ● STANDARDS CONFORMITY


EC Directive	EMC Directive (2014/30/EU)
Conformity	EN61326-1:2013 Low Voltage Directive (2014/35/EU) IEC61010-1 EN61010-1:2010/A1:2019 Installation Category II Pollution Degree 2 Maximum operating voltage 300V Reinforced insulation between [input/output/GND] and power.

## TERMINAL ASSIGNMENTS

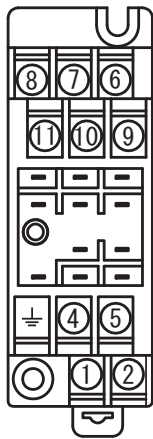


①	P (+)	POWER
②	N (-)	
③	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	+ INPUT	
⑩	- INPUT	
⑪	N.C.	

## BLOCK DIAGRAM

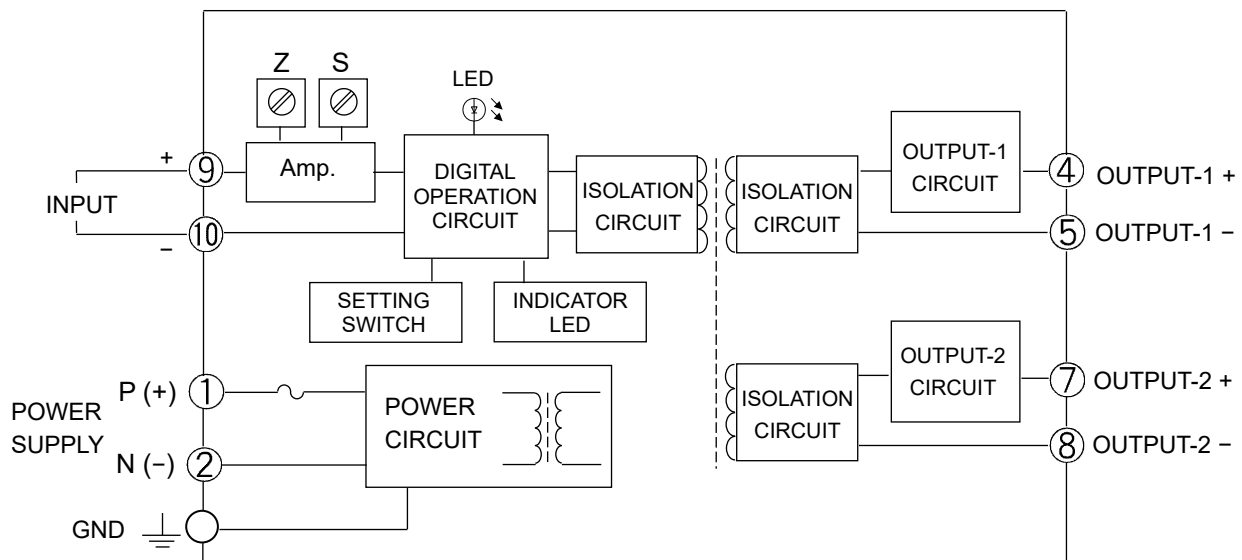

## FRONT VIEW

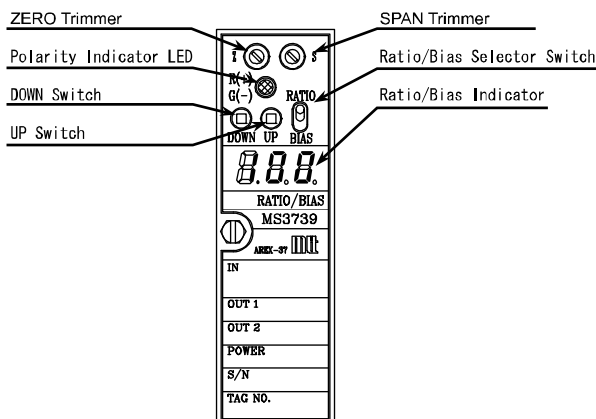

## SETTING

### ● RATIO/BIAS SETTING

#### Ratio Setting

When the Ratio/Bias Selector switch is set to the RATIO position, the Ratio/Bias Indicator shows the current ratio value. This value can be changed to a desired value by pressing the UP/DOWN switch.

#### Bias Setting

When the Ratio/Bias Selector switch is set to the BIAS position, the Ratio/Bias Indicator shows the current bias value. This value can be changed to a desired value by pressing the UP/DOWN switch.

#### Indicators

The Polarity Indicator LED is red when the set value is positive and green when it is negative. The Ratio/Bias Indicator goes OFF if no switch is operated for one minute, while the Polarity Indicator LED keeps illuminating green regardless of the polarity.

### UP/DOWN Switch

The switch is of a push button type. Pressing and holding the switch changes the value faster.

### Factory Default Settings


Unless otherwise requested, the ratio and bias will be set to the factory defaults as indicated below:

Positive gain; Ratio = 1; and Bias = 0%.

### Examples of Positive Gain Setting

The following are typical examples of positive gain setting on a converter configured for 4-20mA DC input and 4-20mA DC output.


- ① To obtain 4-20mA DC output against 4-20mA DC input:  
Ratio = 1.00; Bias = 0%
- ② To obtain 4-20mA DC output against 12-20mA DC input:  
Ratio = 2.00; Bias = -100%
- ③ To obtain 12-20mA DC output against 4-20mA DC input:  
Ratio = 0.50; Bias = 50%

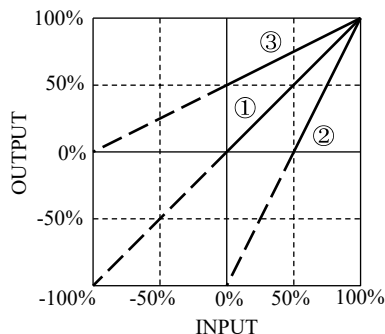

### Examples of Negative Gain Setting

The following are typical examples of negative gain setting on a converter configured for 4-20mA DC input and 4-20mA DC output.

- ① To obtain 20-4mA DC output against 4-20mA DC input:  
Ratio = -1.00; Bias = 0%
- ② To obtain 20-4mA DC output against 12-20mA DC input:  
Ratio = -2.00; Bias = 0%
- ③ To obtain 12-4mA DC output against 4-20mA DC input:  
Ratio = -0.50; Bias = 50%

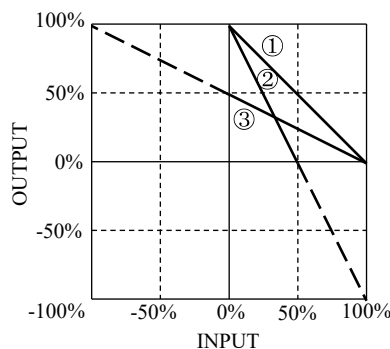

## LED STATUS INDICATORS

### INDICATOR PATTERNS

No.	Event	Ratio/Bias Indicator (7-segment LED)	Polarity Indicator LED	Output	Recovery Operation
1	Power ON or switch operation	Blinks 3 times (1 s ON - 0.5 s OFF cycle).	Green LED turns ON for 1 second, and then red LED turns ON for 0.5 second. This cycle is repeated 3 times.	Normal	—
2	Normal operation	OFF	Green LED is ON.	Normal	—
3	Value setting	Set value	Red LED is ON when the set value is positive; Green LED is ON when it is negative.	Normal	—
4	DAC error	Error code: 1	Red LED blinks at 0.25 second intervals.	Typically 0%, but may vary.	None
5	CRC error of a set value	Error code: 2	Red LED blinks at 1 second intervals.	0%	Reconfiguration
6	CRC error of a compensated value	Error code: 4	Red LED blinks at 1 second intervals.	0%	None
7	System error	Not defined.	Red LED is ON; Green LED is not defined.	Typically 0%, but may vary.	None

Notes:

No. 1: When the Ratio/Bias Indicator is turned ON, a 3-digit number “888” with dots is displayed.

No. 4 - 7: Only the last digit is displayed in the event of an error.

No. 7: The red LED may fail to light up.