

### DESCRIPTION

The MS3711A is a slim, plug-in pulse divider that accepts pulse train signals from sensors or other devices, shapes and divides these pulses, converts signal levels as necessary, and provides isolated single or dual output.

### ORDERING CODE

**Model** MS3711A - ☐ - ☐ ☐ ☐

**Power Supply** \_\_\_\_\_

**A:** 100 to 240V AC (50 to 60Hz)  
**D:** 24V DC **P:** 100 to 240V DC

**Input** \_\_\_\_\_

**O:** Dry contact or open collector  
(Pull-up: Approx. 13V, 3.3kΩ)  
**A:** AC voltage pulse  
(Threshold voltage: Approx. 0.06Vp-p)  
**D:** DC voltage pulse  
(Threshold voltage: Approx. 2V)  
**I:** 4 to 20mA DC pulse  
(Threshold current: Approx. 8mA)  
**Y:** Other input signal and/or threshold voltage

**Output 1** \_\_\_\_\_

**1:** TTL level  
**2:** Open collector  
**3:** Voltage pulse 10V±10%  
**4:** Voltage pulse 12V±10%


**Output 2** \_\_\_\_\_

**No code:** None  
**The codes are the same as for Output 1.**

Note: When a combination of TTL levels or voltage pulses is selected for Outputs 1 and 2, the voltage levels for for both outputs should be the same.

**Options** \_\_\_\_\_

**No code:** None  
**/A:** Sensor power supply: 24V DC (±10%), 2-wire type  
**/B:** Sensor power supply: 12V DC (±10%), 2-wire type  
**/C:** Sensor power supply: 24V DC (±10%), 3-wire type  
**/D:** Sensor power supply: 12V DC (±10%), 3-wire type  
**/X:** Others (Special order)  
\* For non-standard options, ask MTT for availability.

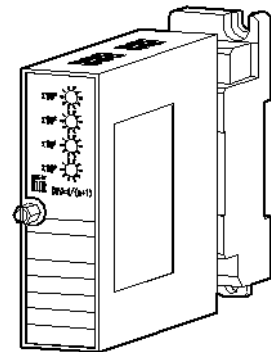

### ORDERING INFORMATION

To place an order, please use the ordering code format as shown on the left.  
(e.g.) MS3711A-A-O22

\* With the default setting, the division ratio is 1/1.

#### Other Ordering Examples:

For an input code of "Y": MS3711A-A-Y22 (Input DC voltage pulse: 0 to 12V / SH=8.5V, SL=2.5V)

For an input code of "Y": MS3711A-A-Y22 (Input AC pulse: 200Vp-p / S= 2Vp-p)

For a specific division ratio: MS3711A-A-O22 (Division ratio: 1/100)

\* SH=Threshold level Hi, SL=Threshold level Lo, S=Threshold level

Note 1: When a DC current pulse is selected for input, the range should be specified between 0-100μA and 0-100mA.

Note 2: If you wish to include multiple options in your order, specify the option codes in series (e.g. /AX).

### SPECIFICATIONS

#### POWER SECTION

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC±10% 100 to 240V DC: 85 to 264V DC		
Power Sensitivity	Better than ±0.1% of span for each power supply range.		
Power Line Fuse	160mA fuse is installed (standard).		
Power Consumption			
Power	100-240V AC	24V DC	100-240V DC
Single Output	5.0VA max	2.1W max	7.2W max
Dual Output	5.5VA max	2.2W max	7.2W max

## INPUT SECTION

Input Resistance		
Voltage Input Model	With power:	1MΩ min. (Standard, 5V input)
	Without power:	10kΩ min.
Current Input Model	250Ω (Standard for 4 to 20mA)	
Note: When a 2-wire type sensor power supply is specified, a shunt resistor of 100Ω is used.		
Allowable Input Voltage		
DC Voltage Input Model	30V DC max., continuous.	
DC Current Input Model	40mA DC max., continuous.	
AC Voltage Input Model	200Vp-p AC max., continuous (up to ±100V with reference to 0V).	
Maximum Input Frequency	100kHz	
Input Pulse Width	10μs min.	
Duty Ratio	40 to 60% (at standard threshold voltage)	
Sensor Power Supply	30mA max. (2-wire or 3-wire type)	
Ranges Available		
	AC Voltage Pulse	DC Voltage Pulse
Input Range	-300 to 300V	0 to 300V
Input Voltage Span	0.1 to 600Vp-p	1 to 300V
Input Bias	N/A	0 to +300%
Threshold Voltage	50mVp-p min.	Hi-Lo voltage: 0.2V min.
Input Spec. Ex.: For 10 to 15V DC voltage pulse input, the input voltage span is 5V and the bias +200%.		

## OUTPUT SECTION

Maximum Output Load

TTL Level

5mA @ 3.5V

Voltage Pulse 10V

7mA @ ±10%

Voltage Pulse 12V

7mA @ ±10%

Maximum Rating

Open collector: 30V, 50mA

Division Ratio

1/1 to 1/10000

Division ratios can be set using the four 10-position rotary switches on the front panel.

Assuming that these four switches are set to a, b, c and d as shown below, a 4-digit number “n” is expressed as follows:

$$n = a \times 10^3 + b \times 10^2 + c \times 10^1 + d \times 10^0$$

where a, b, c and d are variables, each of which takes any of the numbers 0 to 9.

Dividing 1 by (n+1) gives a division ratio.

Division Ratio	Switch Setting			
	×10 <sup>3</sup>	×10 <sup>2</sup>	×10 <sup>1</sup>	×10 <sup>0</sup>
1/n+1	a	b	c	d
1/1	0	0	0	0
1/100	0	0	9	9
1/10000	9	9	9	9

Duty Ratio	40 to 60% (Input pulse duty ratio 50%, standard threshold voltage)
	Note that the duty ratio will be 30 to 70% only when the division ratio is 1/3.
	DC voltage pulse: 0-5V/1kHz input
	AC voltage pulse: 5Vp-p/1kHz input
	Open collector: 1kHz input

## Maximum Output Frequency

Voltage Pulse Output	100kHz
Open Collector Output	50kHz
	(Load resistance 1kΩ max.)
(For both of the above, the conditions are as follows: input pulse duty ratio 50% and standard threshold voltage)	

## PERFORMANCE

Isolation	4-way isolation between input, output [Output 1/Output 2], power, and ground.
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output [Output 1/Output 2], power, and ground.
Dielectric Strength	Input / Output [Output 1/Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

## PHYSICAL


Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-out prevention screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 × H86 × D125mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

## MATERIALS

Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2μm gold plating
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Anti-Humidity Coating	HumiSeal® 1A27NS (Polyurethane)


\* HumiSeal® is a registered trademark of Chase Corporation.

## TERMINAL ASSIGNMENT

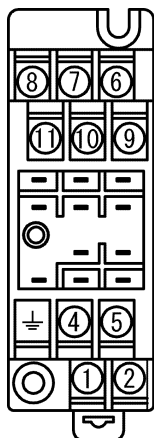


①	P (+)	POWER
②	N (-)	
⏏	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	+ INPUT	
⑩	- INPUT	
⑪	EX	


## BLOCK DIAGRAM

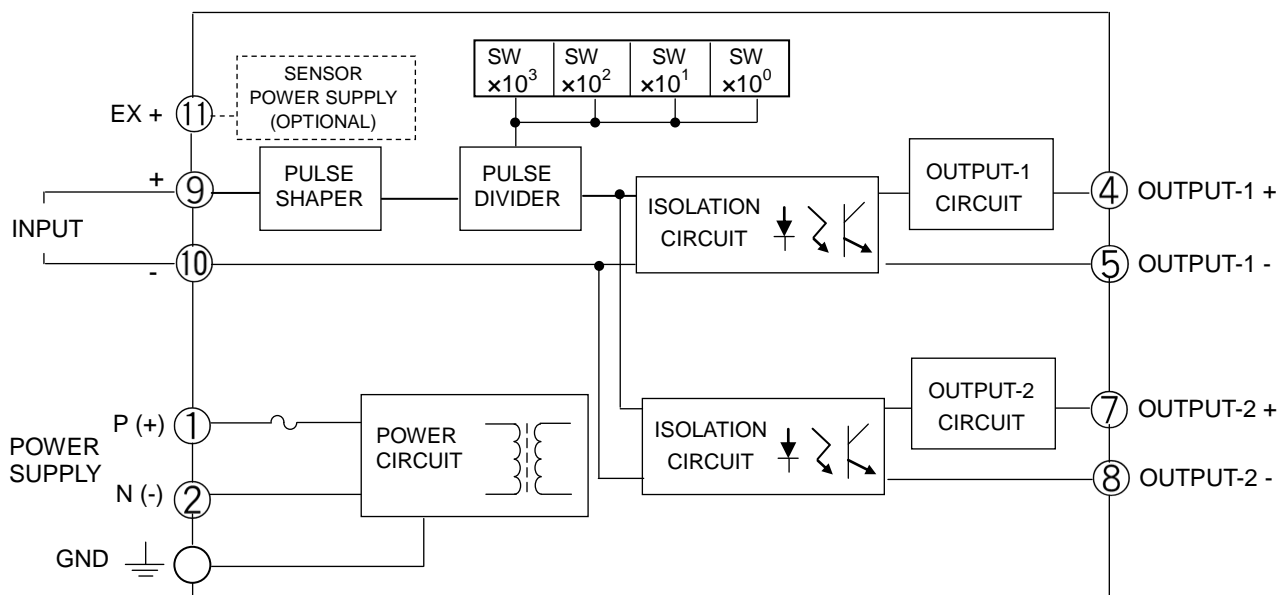

For dry contact or open collector input:

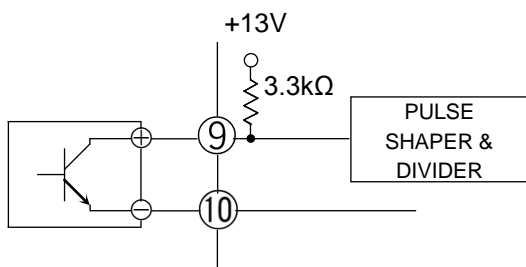

For voltage pulse input:

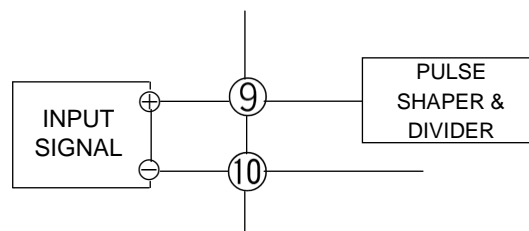

When a 2-wire sensor is used:

Note: The connections may vary with the type of the sensor used.

