




電源の接続

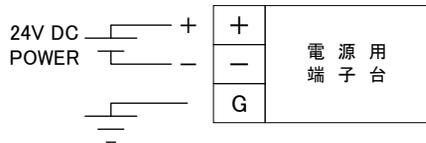


RC4000-16-CN-D1-rr

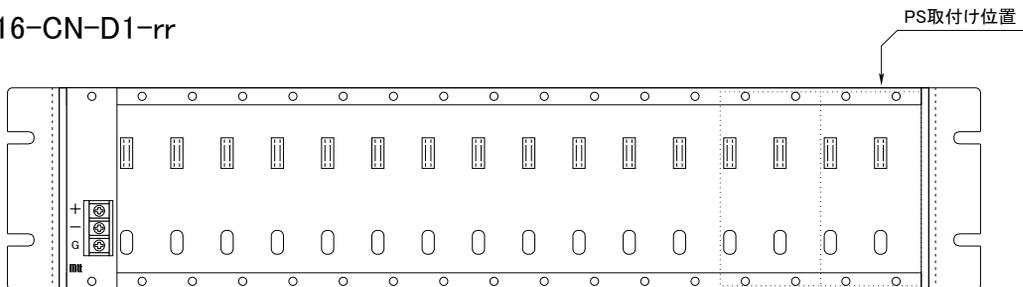


RC4000-12-CN-D1-rr

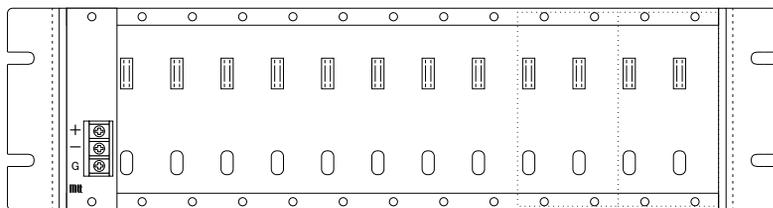


RC4000-08-CN-D1-rr

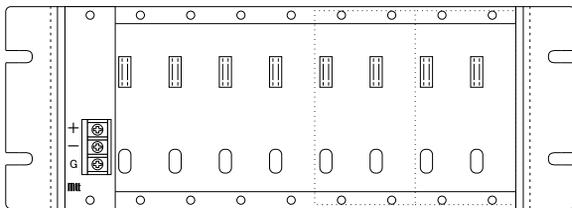


RC4000-04-CN-D1-rr

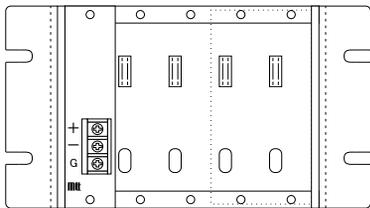

PF4000-C2-D1-rr

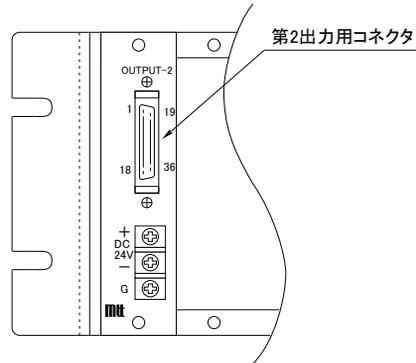

電源の接続

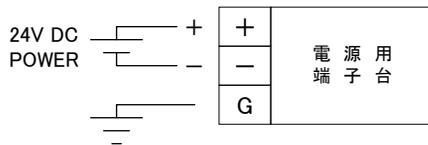


第2出力用コネクタ
ピン配列


1	+	CH1	-	2
3	+	CH2	-	4
5	+	CH3	-	6
7	+	CH4	-	8
9	+	CH5	-	10
11	+	CH6	-	12
13	+	CH7	-	14
15	+	CH8	-	16
19	+	CH9	-	20
21	+	CH10	-	22
23	+	CH11	-	24
25	+	CH12	-	26
27	+	CH13	-	28
29	+	CH14	-	30
31	+	CH15	-	32
33	+	CH16	-	34
17,35		N. C.		18,36

使用コネクタ 型式: 174726-3
 メーカー: AMP
 適合コネクタ 型式: 2-174731-3
 メーカー: AMP

PF4000-C3-D1-rr

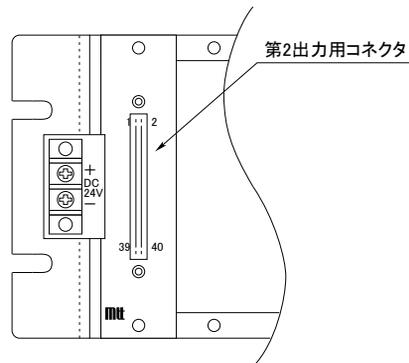



電源の接続



第2出力用コネクタ
ピン配列

40	+	CH1	-	39
38	+	CH2	-	37
36	+	CH3	-	35
34	+	CH4	-	33
32	+	CH5	-	31
30	+	CH6	-	29
28	+	CH7	-	27
26	+	CH8	-	25
24	+	CH9	-	23
22	+	CH10	-	21
20	+	CH11	-	19
18	+	CH12	-	17
16	+	CH13	-	15
14	+	CH14	-	13
12	+	CH15	-	11
10	+	CH16	-	9
2,4,6,8		N. C.		1,3,5,7

使用コネクタ 型式: HIF3E-40PA-2.56DS
 メーカー: ヒロセ電機

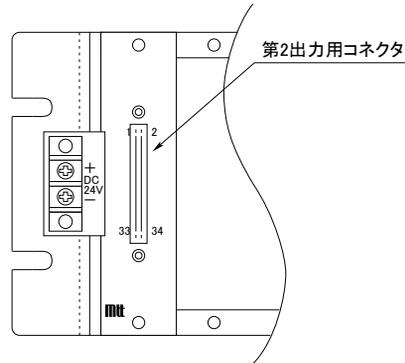PF4000-C5-D1-rr

電源の接続

**第2出力用コネクタ
ピン配列**


34	+	CH1	-	33
32	+	CH2	-	31
30	+	CH3	-	29
28	+	CH4	-	27
26	+	CH5	-	25
24	+	CH6	-	23
22	+	CH7	-	21
20	+	CH8	-	19
18	+	CH9	-	17
16	+	CH10	-	15
14	+	CH11	-	13
12	+	CH12	-	11
10	+	CH13	-	9
8	+	CH14	-	7
6	+	CH15	-	5
4	+	CH16	-	3
2		N. C.		1

使用コネクタ 型式: HIF3F-34PA-2.54DS

メーカー: ヒロセ電機

適合コネクタ 型式: HIF3BA-34D-2.54R-CL (21)

メーカー: ヒロセ電機

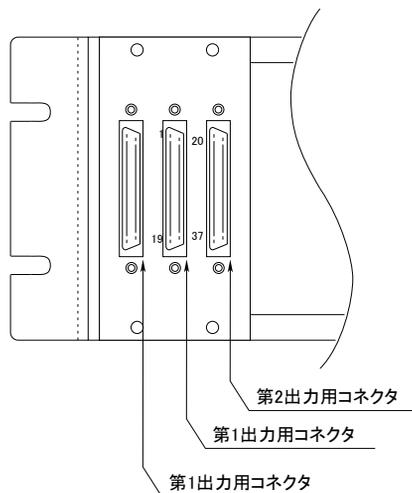PF4000-C6-DN-rr

**第1,2出力用コネクタ
ピン配列**

2	+	CH1	-	21
3	+	CH2	-	22
4	+	CH3	-	23
5	+	CH4	-	24
6	+	CH5	-	25
7	+	CH6	-	26
8	+	CH7	-	27
9	+	CH8	-	28
10	+	CH9	-	29
11	+	CH10	-	30
12	+	CH11	-	31
13	+	CH12	-	32
14	+	CH13	-	33
1,15~19		N. C.		20,34~37

使用コネクタ 型式: FDCCD-37S

メーカー: ヒロセ電機

適合コネクタ 型式: HDCB-39P

メーカー: ヒロセ電機

* 但しAC100V電源使用時のみに適応

RC4000-MB-D1-rr

電源の接続

24V DC POWER + - G

電源用端子台

(背面)

第1,2出力用コネクタ ピン配列

39	+	CH1	-	40
37	+	CH9	-	38
35	+	CH2	-	36
33	+	CH10	-	34
31	+	CH3	-	32
29	+	CH11	-	30
27	+	CH4	-	28
25	+	CH12	-	26
23	+	CH5	-	24
21	+	CH13	-	22
19	+	CH6	-	20
17	+	CH14	-	18
15	+	CH7	-	16
13	+	CH15	-	14
11	+	CH8	-	12
9	+	CH16	-	10
1,3,5,7		N. C.		2,4,6,8

使用コネクタ 型式: 172092-6
メーカー: AMP
適合コネクタ 型式: 172083-6
メーカー: AMP

RC4000-YH

電源の接続

24V DC POWER + - G

電源用端子台


第2出力用コネクタ ピン配列

1,2	短絡		48,49	
3	+	CH1	-	4
5	+	CH2	-	6
7	+	CH3	-	8
9	+	CH4	-	10
27	+	CH5	-	26
29	+	CH6	-	28
31	+	CH7	-	30
33	+	CH8	-	32
11	+	CH9	-	12
13	+	CH10	-	14
15	+	CH11	-	16
17	+	CH12	-	18
19	+	CH13	-	20
21	+	CH14	-	22
23	+	CH15	-	24
25	+	CH16	-	50
36,38,39		N. C.		42,43,44


34,35,37,40,41,44,46,47番ピンと
ch1~16のマイナス側は全て短絡

使用コネクタ 型式: 57LE-40500-73CO (D3)
メーカー: DDK
適合コネクタ 型式: 57LE-30500
メーカー: DDK


RC4000-02DC



電源の接続

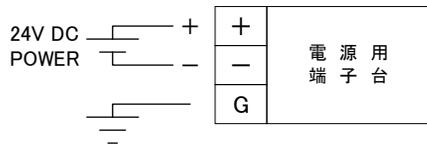

RC4000-02AC



電源の接続

