




## DESCRIPTION

The MS3906 is a chassis-mount strain gauge transmitter that supplies excitation voltage to strain-gauge type pressure sensors, load cells, and the like and converts their output signals into mutually isolated dual channel DC output signals.

- ▽ A multi-slot chassis provides ease of maintenance and high-density mounting.
- ▽ Input, output 1, output 2, and power circuits are all isolated from each other.
- ▽ Equipped with a fuse on the DC power line as standard.

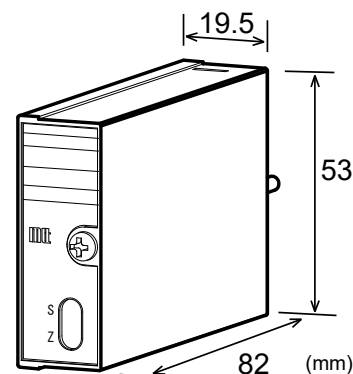

## ORDERING INFORMATION

Ordering Code
MS3906-□□-□□-1□□-8□□
[1] [2] [3] [4]

## SPECIFICATIONS

## POWER SECTION

Power Requirement	24V DC±10%
Power Sensitivity	Better than ±0.1% of span per 10% change in supply voltage
Power Line Fuse	160mA fuse
Current Consumption	70mA max. at 24V DC

## INPUT SECTION

Excitation Voltage (Specify a code in the field [1].)	■ 5V DC ..... E2 ■ 10V DC ..... E3 ■ Other DC voltages ..... EY(□□□) Specify a voltage between 5V and 10V in parentheses. 5V DC at 120Ω bridge resistance 10V DC at 350Ω bridge resistance
Bridge Resistance (Specify resistance in the field [2].)	Specify a resistance value.
Input (Specify a code in the field [3].)	■ 0–10mV DC ..... V2 ■ 0–100mV DC ..... V3 ■ ±10mV DC ..... W2 ■ ±100mV DC ..... W3 ■ Other DC voltage signals .. X1(□–□) Specify a voltage range in parentheses. The span must be 5mV or greater.
Input Resistance	1MΩ min. (10kΩ min. without power)
Allowable Input Voltage	30V DC max., continuous.

## OUTPUT SECTION

Output (Specify a code in the field [4].)	Output 1 / Output 2 ..... Code ■ 1–5V DC / 1–5V DC ..... V1 ■ 0–5V DC / 0–5V DC ..... V5 ■ 0–10V DC / 0–10V DC ..... V6 ■ ±5V DC / ±5V DC ..... W5 ■ ±10V DC / ±10V DC ..... W6 ■ 1–5V DC / 4–20mA DC ..... C1 Note: Combinations of two outputs are only available as shown above.
Allowable Output Load	Voltage output: 2mA max. Current output: 300Ω max.
Zero Adjustment	Approx. ±5% of span (Adjustable by front-accessible trimmer)
Span Adjustment	Approx. ±5% of span (Adjustable by front-accessible trimmer)

## PERFORMANCE

Accuracy Rating	Better than ±0.1% of span (at 25°C±5°C)
Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.
Response Time	180ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output 1, output 2, and power.
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output 1, output 2, and power.
Dielectric Strength	Input / [Output 1, Output 2, Power]: 1500V AC for 1 minute (Cutoff current: 0.5mA) Output 1 / Output 2 / Power: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: 0 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	–10 to 60°C

## PHYSICAL

Installation	Mounted in an optional chassis (RC3900A-□□AI or RS3900-01TB).
Wiring	Wired to an optional chassis (RC3900A-□□AI or RS3900-01TB).
External Dimensions	W19.5 × H53 × D82mm
Weight	80g max.

## MATERIAL


Housing	ABS resin
PC Board	Glass fabric, epoxy resin (FR-4: UL 94V-0)
Conformal Coating	HumiSeal® 1A27NSLU (Polyurethane)

\* HumiSeal® is a registered trademark of Chase Corporation.

## ADDITIONAL

Optional Parameter Changes	<p>You can optionally specify the following parameters when ordering. Please ask our Sales representatives for availability in advance.</p> <p>&lt;Parameter&gt; ..... &lt;How to specify&gt;</p> <p>■ Response frequency · Fc = □□□Hz</p> <p>■ Response time constant · Tc = □□□s</p>
----------------------------	--

## PIN ASSIGNMENTS



PIN	SIGNAL	PIN	SIGNAL
①	+ INPUT	①	+ OUTPUT 1
②	- INPUT	②	- OUTPUT 1
③	N. C.	③	+ OUTPUT 2
④	- EX	④	- OUTPUT 2
⑤	+ EX	⑤	+ POWER DC24V
⑥	N. C.	⑥	-
		⑦	N. C.
		⑧	N. C.
		⑨	F. G.
		⑩	N. C.

## BLOCK DIAGRAM

