

DESCRIPTION

The MS3702 is a slim, plug-in RTD temperature transmitter that converts input signals from an RTD into commonly used DC signals and provides isolated single or dual output.

ORDERING CODE

MS3702 - -

Model _____


Power Supply _____
A: 100 to 240V AC (50 to 60Hz)
D: 24V DC **P:** 100 to 240V DC

Input Signal _____
P1: Pt 100Ω **J:** JPt 100Ω
P5: Pt 50Ω **N:** Ni 508.4Ω
Y: Other than those above.

Output 1 _____
A: 4 to 20mA DC **1:** 0 to 10mV DC
D: 0 to 20mA DC **2:** 0 to 100mV DC
Z: Other DC current signal **3:** 0 to 1V DC
4: 0 to 10V DC
5: 0 to 5V DC
6: 1 to 5V DC
3W: ±1V DC
4W: ±10V DC
5W: ±5V DC
0: Other DC voltage signal

Output 2 _____
No code: None
The codes are the same as for Output 1.
 Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.
 Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.
 Note 3: Upscale burnout protection is standard.

Options _____
No code: None
/K: Fast response (0 to 90% response time: 10ms max.)
/L: Dual current output with high output load
 * Note subject to CE approval.
 (OUT-1: 750Ω / OUT-2: 550Ω)
/X: Others (Special order)
 * For non-standard options, ask MTT for availability.

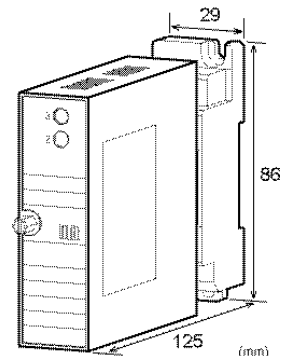
ORDERING INFORMATION

To place an order, please use the ordering code format as shown on the left. Also specify a measuring temperature range.

(e.g.) MS3702-A-P1A6 (0 to 150°C)

* Note that the temperature range should be specified in steps of at least 10 degrees Celsius.

Other Ordering Examples:

For an input code of "Y": MS3702-A-YAA (Input: Cu 10Ω at 0°C / 0 to 100°C)

For an output code of "0": MS3702-A-P106 (0 to 150°C / Output: 2 to 5V)

For an option code of "X": MS3702-A-P1AA/X (0 to 150°C / Response frequency 50Hz)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

SPECIFICATIONS
POWER SECTION

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC±10% 100 to 240V DC: 85 to 264V DC
Power Sensitivity	Better than ±0.1% of span for each power supply range.
Power Line Fuse	160mA fuse is installed (standard).

Power Consumption

Power	100-240V AC	24V DC	100-240V DC
Single Output	5.5VA max	1.6W max	6.0W max
Dual Output	7.0VA max	1.8W max	6.0W max

INPUT SECTION

Excitation Current	Approx. 1mA with Pt for 0 to 100°C
Lead Wire Resistance	200Ω max. per wire
Ranges Available	<Standard specifications> (Temp at 0% input = 0°C)

Pt 100Ω	Specify between 0-50°C and 0-500°C in steps of 50°C (e.g. Pt 100Ω, 0 to 150°C).
JPt 100Ω	Specify between 0-50°C and 0-500°C in steps of 50°C (e.g. JPt 100Ω, 0 to 250°C).
Pt 50Ω	0 to 100°C

<Quasi-standard specifications>

RTD	Temperature Range (°C)	Input Span	Input Bias
Pt 100Ω	-200 to +850	50°C min.	Up to 4x the input span.
JPt 100Ω	-200 to +500	50°C min.	
Pt 50Ω	-200 to +600	100°C min.	
Ni 508.4Ω	-50 to +250	30°C min.	

Input Spec Ex.: For Pt 100Ω (150 to 200°C), the input span is 50°C and the bias 150°C (3x the span).

Note: Any specification out of the temperature range or bias requirement listed above is handled as a special order.

● OUTPUT SECTION

Maximum Output Load

Voltage Output (DC)	1V span and up	2mA max.
	10mV	10kΩ min.
Current Output (DC)	100mV	100kΩ min.
	4-20mA single output	750Ω max.
Current Output (DC)	4-20mA dual output	Output 1: 550Ω max.
		Output 2: 350Ω max.

Zero Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
-----------------	---

Span Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
-----------------	---

Burnout Protection	Upscale (even if any of the three wires, A, B, and B' is opened)
--------------------	--

Ranges Available

	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%

* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.

Output Spec Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.

Output Spec Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.

● PERFORMANCE

Accuracy Rating	Better than ±0.15% of span (at 25°C±5°C).
Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.
Response Time	170ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output [Output 1/Output 2], power, and ground.
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output [Output 1/Output 2], power, and ground.
Dielectric Strength	Input / Output [Output 1/Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.

Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

● PHYSICAL

Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-out prevention screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 × H86 × D125mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

● MATERIALS


Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2µm gold plating
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Anti-Humidity Coating	HumiSeal® 1A27NS (Polyurethane)

* HumiSeal® is a registered trademark of Chase Corporation.

● STANDARDS CONFORMITY

CE Directive Conformity	EMC Directive (2014/30/EU) EN61326-1: 2013 Low Voltage Directive (2014/35/EU) IEC61010-1/EN61010-1: 2010 Installation Category II Pollution Degree 2 Maximum operating voltage 300V Reinforced insulation between [input/output/GND] and power.
-------------------------	--

TERMINAL ASSIGNMENT

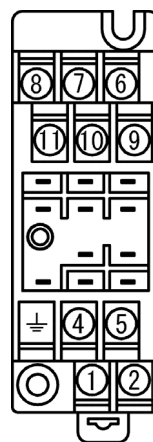

①	P (+)	POWER
②	N (-)	
⊥	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	A RTD	
⑩	B RTD	
⑪	B' RTD	

BLOCK DIAGRAM

