



**DESCRIPTION**

The MS3902 is a chassis-mount RTD temperature transmitter that supplies constant current to a three-wire RTD and converts its mV input signals into mutually isolated dual channel DC output signals.

- ▽ Features linearization and burnout protection.
- ▽ A multi-slot chassis provides ease of maintenance and high-density mounting.
- ▽ Input, output 1, output 2, and power circuits are all isolated from each other.
- ▽ Equipped with a fuse on the DC power line as standard.

**ORDERING INFORMATION**

<b>Ordering Code</b>
MS3902-□(□-□)-8□□_
[1] [2] [3] [4]


**SPECIFICATIONS**

**POWER SECTION**

Power Requirement	24V DC±10%	
Power Sensitivity	Better than ±0.1% of span per 10% change in supply voltage	
Power Line Fuse	Output Code	Fuse
	V1, V5, V6, W5, W6, C1 C2	160mA fuse 300mA fuse
Current Consumption	60mA max. at 24V DC	

**INPUT SECTION**

Input (Specify a code in the field [1].)	JIS or other standard RTDs	Code
	<ul style="list-style-type: none"> <li>■ Pt 100Ω ..... Pt100</li> <li>■ JPt 100Ω ..... JPt100</li> <li>■ Pt 50Ω ..... Pt50</li> <li>■ Cu 25Ω ..... Cu25</li> <li>■ Cu 100Ω ..... Cu100</li> <li>■ Ni 508.4Ω ..... Ni508</li> <li>■ Other than the above ..... X</li> </ul>	
	Specify an RTD standard (A) and symbol (B) as indicated below: X = A / B	
	Notes:	
	1. When a JIS symbol is specified, the resistance table of the latest edition of the relevant JIS will be used, unless otherwise specified.	
	2. For other RTD types, submission of a resistance table may be required.	

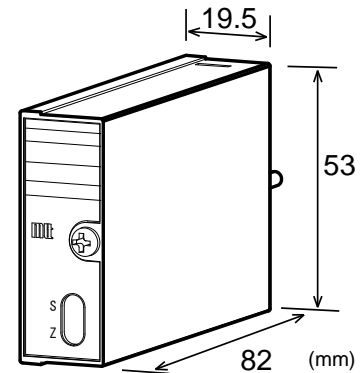

Input Range (Specify a range in the field [2].)	Specify an input range in °C within the range given in the resistance table.
Excitation Current	Approx. 1mA
Input Resistance	1MΩ min. (1kΩ min. without power)
Allowable Lead Wire Resistance	200Ω max. per wire

**OUTPUT SECTION**

Output (Specify a code in the field [3].)	Output 1 / Output 2 ..... Code
	<ul style="list-style-type: none"> <li>■ 1-5V DC / 1-5V DC ..... V1</li> <li>■ 0-5V DC / 0-5V DC ..... V5</li> <li>■ 0-10V DC / 0-10V DC ..... V6</li> <li>■ ±5V DC / ±5V DC ..... W5</li> <li>■ ±10V DC / ±10V DC ..... W6</li> <li>■ 1-5V DC / 4-20mA DC ..... C1</li> <li>■ 4-20mA DC / 4-20mA DC ..... C2</li> </ul>
	Note: Combinations of two outputs are only available as shown above.
Allowable Output Load	Voltage output: 2mA max. Current output: 300Ω max. (350Ω max. for dual current output)
Zero Adjustment	Approx. ±2% of span (Adjustable by front-accessible trimmer)
Span Adjustment	Approx. ±2% of span (Adjustable by front-accessible trimmer)
Burnout Protection	Upscale (even if any of the three wires, A, B, and B' is opened)

**ADDITIONAL**

Option (Specify the code in the field [4].)	<ul style="list-style-type: none"> <li>■ CE Compliant ..... /C</li> </ul>
	Notes:
	1. This applies to orders having an output code other than “-8C2”.
	2. CE-compliant chassis must be used to meet the CE marking requirements.
Optional Parameter Changes	You can optionally specify the following parameters when ordering. Please ask our Sales representatives for availability in advance.
	<Parameter> ..... <How to specify>
	■ Response frequency · Fc = □□□Hz
	■ Response time constant · Tc = □□□s

**PERFORMANCE**

Accuracy Rating	Better than $\pm(0.15\%$ of span + $0.1^{\circ}\text{C}$ ) (at $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$ )
Temperature Effect	Better than $\pm 0.2\%$ of span per $10^{\circ}\text{C}$ change in ambient.
Response Time	170ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output 1, output 2, and power.
Insulation Resistance	100M $\Omega$ min. (@ 500V DC) between input, output 1, output 2, and power.
Dielectric Strength	Input / [Output 1, Output 2, Power]: 1500V AC for 1 minute (Cutoff current: 0.5mA) Output 1 / Output 2 / Power: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: 0 to $55^{\circ}\text{C}$ Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to $60^{\circ}\text{C}$

**PHYSICAL**

Installation	Mounted in an optional chassis (RC3900A-□□AI or RS3900-01TB)
Wiring *1	Wired to an optional chassis (RC3900A-□□AI or RS3900-01TB)
External Dimensions	W19.5 × H53 × D82mm
Weight	70g max.

\*1: For a dual current output version, external connection to the Output-1 shall only be made with either the terminal block or D-subminiature connector.

**MATERIAL**


Housing	ABS resin
PC Board	Glass fabric, epoxy resin (FR-4: UL 94V-0)
Conformal Coating	HumiSeal® 1A27NSLU (Polyurethane)

\* HumiSeal® is a registered trademark of Chase Corporation.

**STANDARDS CONFORMITY**

EC Directive Conformity	EMC Directive (2014/30/EU) EN61326-1: 2013
-------------------------	---

**PIN ASSIGNMENTS**



PIN	SIGNAL	PIN	SIGNAL
①	A RTD	①	+ OUTPUT 1
②	B RTD	②	- OUTPUT 1
③	N. C.	③	+ OUTPUT 2
④	N. C.	④	- OUTPUT 2
⑤	B' RTD	⑤	+ POWER DC24V
⑥	N. C.	⑥	- POWER DC24V
		⑦	N. C.
		⑧	N. C.
		⑨	F. G.
		⑩	N. C.

**BLOCK DIAGRAM**

