

DESCRIPTION

The MS5307B is a plug-in distributor that powers a two-wire transmitter, converts its 4 to 20mA signals into commonly used DC signals, and provides an isolated dual output. This model can also be used as an isolator.

ORDERING CODE

MS5307B - -

Model _____

Power Supply _____
A: 100 to 240V AC (50 to 60Hz)
D: 24V DC **P:** 100 to 240V DC

Input _____
 4 to 20mA DC from 2-wire transmitters

Output 1 _____
A: 4 to 20mA DC **1:** 0 to 10mV DC
D: 0 to 20mA DC **2:** 0 to 100mV DC
Z: Other DC current signal **3:** 0 to 1V DC
 4: 0 to 10V DC
 5: 0 to 5V DC
 6: 1 to 5V DC
 0: Other DC voltage signal

Output 2 _____
The codes are the same as for Output 1.


Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.
 Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.

Options _____
No code: None
/K: Fast response (0 to 90% response time: 10ms max.)
/X: Others (Special order)
 * For non-standard options, ask MTT for availability.

ORDERING INFORMATION

To place an order, please use the ordering code format as shown above.
 (e.g.) MS5307B-A-A6

Other Ordering Examples:
 For an output code of "0": MS5307B-A-60 (Output: 2 to 5V)
 For an option code of "X": MS5307B-A-AA/X (Response frequency: 50Hz)
 Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

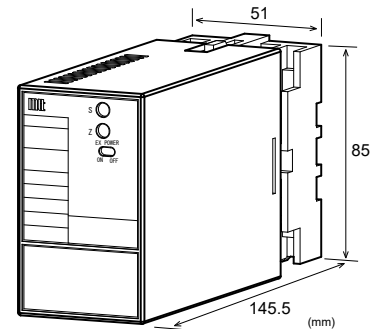

SPECIFICATIONS

POWER SECTION

| | | | |
|----------------------------------|---|--------------|--------------|
| Power Requirements | 100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC±10% 100 to 240V DC: 85 to 264V DC | | |
| Power Sensitivity | Better than ±0.1% of span for each power supply range. | | |
| Power Line Fuse | 160mA fuse | | |
| Maximum Power Consumption | | | |
| Power | 100-240V AC | 24V DC | 100-240V DC |
| | Approx. 7.0VA | Approx. 2.4W | Approx. 8.4W |

INPUT SECTION

| | | | |
|---|--|--|--|
| Input Signal | 4 to 20mA DC from 2-wire transmitters | | |
| Input Resistance | 250Ω | | |
| Transmitter Power Supply | Output voltage: 26.4V, typical. (0% input) 21.6V, typical. (100% input) Maximum current: 22mA, typical. | | |
| Limit Current for Short-Circuit Protection | 40mA max. | | |
| Permissible Short-Circuit Duration | Continuous. | | |

OUTPUT SECTION

| | | |
|------------------------------|---|---|
| Allowable Output Load | | |
| Voltage Output (DC) | 1V span and up 10mV 100mV | 2mA max. 10kΩ min. 100kΩ min. |
| Current Output (DC) | 4-20mA single output 4-20mA dual output | 750Ω max. Output 1: 550Ω max. Output 2: 350Ω max. |
| Zero Adjustment | Approx. ±5% of span. (Adjustable by the front-accessible trimmer.) | |
| Span Adjustment | Approx. ±5% of span. (Adjustable by the front-accessible trimmer.) | |

| Ranges Available | | |
|-------------------|----------------|----------------|
| | Current Signal | Voltage Signal |
| Output Range (DC) | 0 to 20mA | 0 to 10V |
| Output Span (DC) | 4 to 20mA | 10mV to 10V |
| Output Bias | 0 to 100% | 0 to 100% |

* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.

Output Spec. Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.

Output Spec. Ex. 2: For 4 to 8V output, the output span is 4V and the bias +100%.

| PERFORMANCE | |
|----------------------------|---|
| Accuracy Rating | Better than ±0.1% of span (at 25°C±5°C). |
| Temperature Effect | Better than ±0.2% of span per 10°C change in ambient. |
| Response Time | 85ms max. (0 to 90%) with a step input at 100%. |
| CMRR | 100dB min. (500V AC, 50/60Hz) |
| Isolation | 5-way isolation between input, output 1, output 2, power, and ground. |
| Insulation Resistance | 100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground. |
| Dielectric Strength | Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA) |
| Surge Withstand Capability | Tested as per ANSI/IEEE C37.90.1-1989. |
| Operating Environment | Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing) |
| Storage Temperature | -10 to 60°C |


| PHYSICAL | |
|----------------------|---|
| Installation | Wall/DIN rail mounting |
| Mounting Orientation | Vertical |
| Screwing Torque | 0.78 to 1.18 [Nm] * Recommended |
| Wiring | M3.5 screw terminal connection |
| External Dimensions | W51 × H85 × D145.5mm (including the socket) |
| Weight | Main unit: 200g max. Socket: 80g max. |

MATERIALS

| | |
|-----------------------|---|
| Housing | ABS resin (UL 94V-0) |
| Socket | ABS resin (UL 94V-0) |
| Screw Terminal | Galvanized steel with trivalent chromate finish |
| Printed Circuit Board | Glass fabric epoxy resin (FR-4: UL 94V-0) |
| Conformal Coating | HumiSeal® 1A27NS (Polyurethane) |


HumiSeal® is a registered trademark of Chase Corporation.

TERMINAL ASSIGNMENT

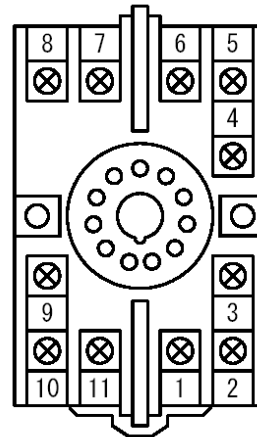


| | | |
|---|------------|-------|
| ① | + OUTPUT 1 | |
| ② | - OUTPUT 1 | |
| ③ | N.C. | |
| ④ | + INPUT | |
| ⑤ | - INPUT | |
| ⑥ | COM | |
| ⑦ | P (+) | POWER |
| ⑧ | N (-) | |
| ⑨ | GND | |
| ⑩ | + OUTPUT 2 | |
| ⑪ | - OUTPUT 2 | |

BLOCK DIAGRAM

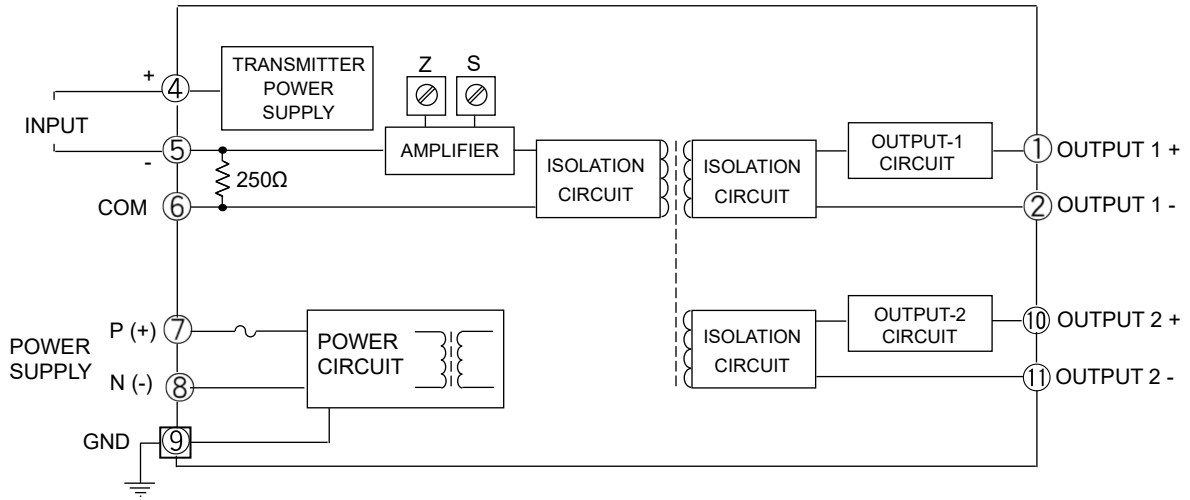

When used as a distributor:

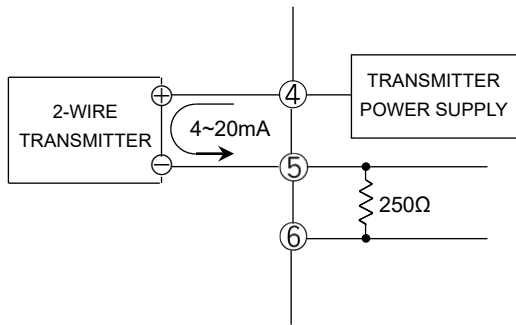

When used as an isolator:

