

### DESCRIPTION

The MS5310 is a plug-in type potentiometer transmitter that detects changes in the resistance of potentiometric sensors, converts them into commonly used DC signals and provides an isolated dual output.

### ORDERING CODE

**MS5310** - ☐ - ☐ ☐

**Model** \_\_\_\_\_

**Power Supply** \_\_\_\_\_

**A:** 100 to 240V AC (50 to 60Hz)  
**D:** 24V DC                      **P:** 100 to 240V DC

**Input** \_\_\_\_\_

Range between 0-100Ω and 0-10kΩ

**Output 1** \_\_\_\_\_

**A:** 4 to 20mA DC                      **1:** 0 to 10mV DC  
**D:** 0 to 20mA DC                      **2:** 0 to 100mV DC  
**Z:** Other DC current signal        **3:** 0 to 1V DC  
    **4:** 0 to 10V DC  
    **5:** 0 to 5V DC  
    **6:** 1 to 5V DC  
    **3W:** ±1V DC  
    **4W:** ±10V DC  
    **5W:** ±5V DC  
    **0:** Other DC voltage signal

**Output 2** \_\_\_\_\_

**The codes are the same as for Output 1.**

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.

Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.


### Options

**No code:** None

**/K:** Fast response (0 to 90% response time: 10ms max.)

**/X:** Others (Special order)

\* For non-standard options, ask MTT for availability.

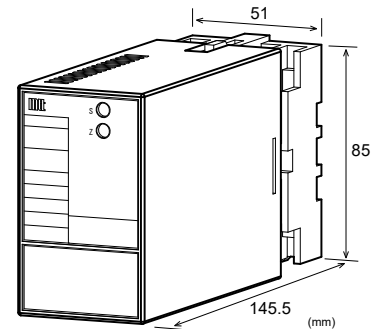

### ORDERING INFORMATION

To place an order, please use the ordering code format as shown on the left.

(e.g.) MS5310-A-A6

\* Resistance range: Specify a resistance range (e.g. 0 to 1kΩ); otherwise, products will be supplied with a factory default of 0 to 10kΩ.

#### Other Ordering Examples:

For an output code of "0": MS5310-A-A0 (Output: 2 to 5V)

For a specific resistance range: MS5310-A-AA (0 to 500Ω)

(When you specify a resistance range, our factory performs the test accordingly, the fact of which will be indicated in the label attached.)

For an option code of "X": MS5310-A-AA/X (Response frequency: 50Hz)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

### SPECIFICATIONS

#### POWER SECTION

<b>Power Requirements</b>	100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC±10% 100 to 240V DC: 85 to 264V DC		
<b>Power Sensitivity</b>	Better than ±0.1% of span for each power supply range.		
<b>Power Line Fuse</b>	160mA fuse		
<b>Maximum Power Consumption</b>			
Power	100-240V AC	24V DC	100-240V DC
	Approx. 5.0VA	Approx. 1.5W	Approx. 6.0W

#### INPUT SECTION

<b>Input Signal</b>	Range between 0-100Ω and 0-10kΩ.
<b>Measuring Voltage</b>	Approx. 0.5V
<b>Allowable Lead Wire Resistance</b>	10% or less of total resistance per wire. (The resistance of all three wires must be equal.)

## ● OUTPUT SECTION

Allowable Output Load		
Voltage Output (DC)	1V span and up	2mA max.
	10mV	10kΩ min.
	100mV	100kΩ min.
Current Output (DC)	4-20mA single output	750Ω max.
	4-20mA dual output	Output 1:
		550Ω max.
		Output 2:
		350Ω max.
Zero Adjustment	Approx. 0 to 50% of total resistance. (Adjustable by the front-accessible trimmers.)	
Span Adjustment	Approx. 50 to 100% of total resistance. (Adjustable by the front-accessible trimmers.)	
Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%
* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.		
Output Spec. Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.		
Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.		

## ● PERFORMANCE

Accuracy Rating	Better than $\pm 0.2\%$ of span (at 25°C $\pm 5^\circ$ C).
Temperature Effect	Better than $\pm 0.2\%$ of span per 10°C change in ambient.
Response Time	170ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	5-way isolation between input, output 1, output 2, power, and ground.
Insulation Resistance	100M $\Omega$ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
Dielectric Strength	Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

## ● PHYSICAL


Installation	Wall/DIN rail mounting
Mounting	Vertical
Orientation	
Screwing Torque	0.78 to 1.18 [Nm] * Recommended
Wiring	M3.5 screw terminal connection
External Dimensions	W51 $\times$ H85 $\times$ D145.5mm (including the socket)
Weight	Main unit: 200g max. Socket: 80g max.

## ● MATERIALS

Housing	ABS resin (UL 94V-0)
Socket	ABS resin (UL 94V-0)
Screw Terminal	Galvanized steel with trivalent chromate finish
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Conformal Coating	HumiSeal® 1A27NS (Polyurethane)

\* HumiSeal® is a registered trademark of Chase Corporation.

## TERMINAL ASSIGNMENT

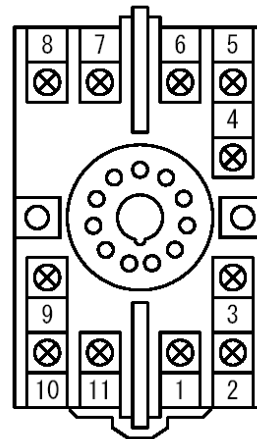

①	+ OUTPUT 1
②	- OUTPUT 1
③	N.C.
④	A POT
⑤	B POT
⑥	C POT
⑦	P (+)
⑧	N (-)
⑨	GND
⑩	+ OUTPUT 2
⑪	- OUTPUT 2

## BLOCK DIAGRAM

