



## Plug-In High-Level Signal Conditioner (Isolator) with Isolated Single Output

## DESCRIPTION

The MS5504 is a plug-in high-level signal conditioner (isolator) that converts DC current or voltage signals into commonly used DC signals and provides an isolated single output.

## ORDERING CODE

**Model** **MS5504** - ☐ - ☐ ☐

**Power Supply** \_\_\_\_\_

**A:** 100 to 240V AC (50 to 60Hz)  
**D:** 24V DC      **P:** 100 to 240V DC

**Input** \_\_\_\_\_

<b>A:</b> 4 to 20mA DC	<b>3:</b> 0 to 1V DC
<b>B:</b> 2 to 10mA DC	<b>4:</b> 0 to 10V DC
<b>C:</b> 1 to 5mA DC	<b>5:</b> 0 to 5V DC
<b>D:</b> 0 to 20mA DC	<b>6:</b> 1 to 5V DC
<b>E:</b> 4 to 20mA DC *1	<b>4W:</b> $\pm 10$ V DC
<b>H:</b> 10 to 50mA DC	<b>5W:</b> $\pm 5$ V DC
<b>Z:</b> Other DC current signal	<b>0:</b> Other DC voltage signal

\*1: Shunt resistor 50 $\Omega$

**Output** \_\_\_\_\_

<b>A:</b> 4 to 20mA DC	<b>1:</b> 0 to 10mV DC
<b>D:</b> 0 to 20mA DC	<b>2:</b> 0 to 100mV DC
<b>Z:</b> Other DC current signal	<b>3:</b> 0 to 1V DC
	<b>4:</b> 0 to 10V DC
	<b>5:</b> 0 to 5V DC
	<b>6:</b> 1 to 5V DC
	<b>3W:</b> $\pm 1$ V DC
	<b>4W:</b> $\pm 10$ V DC
	<b>5W:</b> $\pm 5$ V DC
	<b>0:</b> Other DC voltage signal

**Options** \_\_\_\_\_

**No code:** None

**/K:** Fast response (0 to 90% response time: 10ms max.)

**/X:** Others (Special order)

\* For non-standard options, ask MTT for availability.

## ORDERING INFORMATION

To place an order, please use the ordering code format as shown above.

(e.g.) MS5504-A-AA/K


Other Ordering Examples:

For an input code of "Z": MS5504-A-ZA (Input: 8 to 20mA)

For an output code of "0": MS5504-A-A0 (Output: 2 to 5V)

For an option code of "X": MS5504-A-66/X (0-90% response time: 5ms max.)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

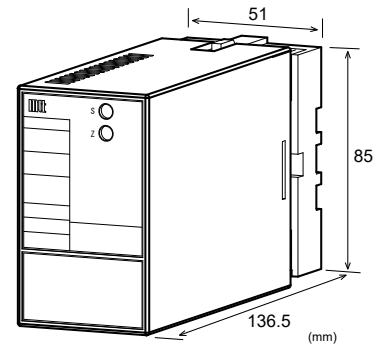

## SPECIFICATIONS

## POWER SECTION

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC $\pm 10\%$ 100 to 240V DC: 85 to 264V DC		
Power Sensitivity	Better than $\pm 0.1\%$ of span for each power supply range.		
Power Line Fuse	160mA fuse		
Maximum Power Consumption			
Power	100-240V AC	24V DC	100-240V DC
	Approx.	Approx.	Approx.
	4.0VA	1.2W	4.8W

## INPUT SECTION

Input Resistance		
Voltage Input (DC)	With or without power: 1M $\Omega$ min.	
Current Input (DC)	4 to 20mA (std.)	250 $\Omega$
	2 to 10mA	250 $\Omega$
	1 to 5 mA	100 $\Omega$
	0 to 20mA	250 $\Omega$
	10 to 50mA	10 $\Omega$
Allowable Input Voltage		
Voltage Input Model	30V DC max., continuous. (Standard for a span up to 10V)	
Current Input Model	40mA DC max., continuous. (Standard for 4 to 20mA)	
Ranges Available	Current Signal	Voltage Signal
Input Range (DC)	-100 to 100mA	-300 to 300V
Input Span (DC)	100 $\mu$ A*1 to 200mA	200mV*2 to 600V
Input Bias	-100 to 100%	-100 to 100%
Note: For any input range including negative input signals, the input spans for current and voltage signals range from (*1)200 $\mu$ A to 200mA and (*2)400mV to 600V, respectively.		
Input Spec. Ex. 1: For 3 to 8V input, the input span is 5V and the bias +60%.		
Input Spec. Ex. 2: For -5 to 0V input, the input span is 5V and the bias -100%.		

## ● OUTPUT SECTION

Allowable Output Load		
Voltage Output (DC)	1V span and up	2mA max.
	10mV	10kΩ min.
	100mV	100kΩ min.
Current Output (DC)	4 to 20mA	750Ω max.
Zero Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)	
Span Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)	
Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%
* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.		
Output Spec. Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.		
Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.		

## ● PERFORMANCE

Accuracy Rating	Better than ±0.1% of span (at 25°C±5°C).
Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.
Response Time	85ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	3-way isolation between input, output, and power.
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output, and power.
Dielectric Strength	Input / Output / Power: 2000V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

## ● PHYSICAL


Installation	Wall/DIN rail mounting
Mounting	Vertical
Orientation	
Screwing Torque	0.78 to 1.18 [Nm] * Recommended
Wiring	M3.5 screw terminal connection
External Dimensions	W51 × H85 × D136.5mm (including the socket)
Weight	Main unit: 200g max. Socket: 60g max.

## ● MATERIALS

Housing	ABS resin (UL 94V-0)
Socket	ABS resin (UL 94V-0)
Screw Terminal	Galvanized steel with trivalent chromate finish
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Conformal Coating	HumiSeal® 1A27NS (Polyurethane)

\* HumiSeal® is a registered trademark of Chase Corporation.

## TERMINAL ASSIGNMENT

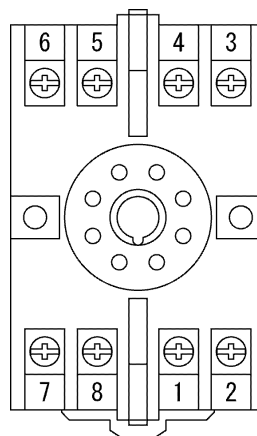

①	+ OUTPUT
②	- OUTPUT
③	+ INPUT
④	- INPUT
⑤	N.C.
⑥	N.C.
⑦	P (+)
⑧	N (-)

POWER

## BLOCK DIAGRAM

