

### DESCRIPTION

The MS3010 is a terminal block type potentiometer transmitter that detects changes in the resistance of potentiometric sensors, converts them into commonly used DC signals and provides an isolated single output.

### ORDERING CODE

**MS3010** - ☐ - ☐ ☐

**Model** \_\_\_\_\_

**Power Supply** \_\_\_\_\_

**D:** 24V DC      **P:** 12V DC

\* The 12V DC version is not subject to CE approval.

**Input** \_\_\_\_\_

**A:** Total resistance 100Ω to 999Ω  
**B:** Total resistance 1kΩ to 10kΩ

**Output** \_\_\_\_\_

<b>A:</b> 4 to 20mA DC	<b>1:</b> 0 to 10mV DC
<b>D:</b> 0 to 20mA DC	<b>2:</b> 0 to 100mV DC
<b>Z:</b> Other DC current signal	<b>3:</b> 0 to 1V DC
	<b>4:</b> 0 to 10V DC
	<b>5:</b> 0 to 5V DC
	<b>6:</b> 1 to 5V DC
	<b>1W:</b> ±10mV DC
	<b>2W:</b> ±100mV DC
	<b>3W:</b> ±1V DC
	<b>4W:</b> ±10V DC
	<b>5W:</b> ±5V DC
	<b>0:</b> Other DC voltage signal

### Options

**No code:** None

**/K:** Fast response (0 to 90% response time: 10ms max.)

**/X:** Others (Special order)

\* For non-standard options, ask MTT for availability.

### ORDERING INFORMATION

To place an order, please use the ordering code format as shown above.

(e.g.) MS3010-D-A6

\* Factory default: Factory testing is carried out with an input range of 0 to 500Ω (input code A) or 0 to 5kΩ (input code B).

Other Ordering Examples:


For an output code of "0": MS3010-D-A0 (Output: 2 to 5V)

For a specific resistance range: MS3010-D-B6 (0 to 2kΩ)

(When you specify a resistance range, our factory performs the test accordingly, the fact of which will be indicated in the label attached.)

For an option code of "X": MS3010-D-A6/X (Response frequency: 50Hz)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

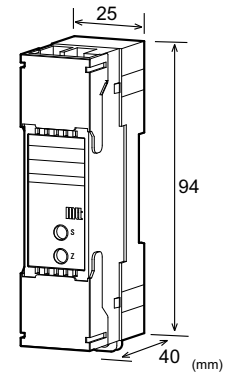

### SPECIFICATIONS

#### POWER SECTION

Power Requirements	24V DC: 24V DC±10% 12V DC: 12V DC±20%	
Power Sensitivity	Better than ±0.1% of span for each power supply range.	
Power Line Fuse	250mA fuse is installed (standard).	
Power Consumption		
Power	24V DC	12V DC
Current Output	50mA max.	70mA max.
Voltage Output	20mA max.	30mA max.
Note: The above figures are in the condition of the rated voltage supplied.		

#### INPUT SECTION

Measuring Voltage	Total resistance 100Ω to 999Ω: Approx. 0.5V Total resistance 1kΩ to 10kΩ: Approx. 5V
Allowable Lead Wire Resistance	10% or less of total resistance per wire. (The resistance of all three wires must be equal.)

#### OUTPUT SECTION

Allowable Output Load		
Voltage Output (DC)	1V span and up 10mV 100mV	2mA max. 10kΩ min. 100kΩ min. 550Ω max.
Current Output (DC)		
Zero Adjustment	Approx. 0 to 30% of total resistance. (Adjustable by the front-accessible trimmer.)	
Span Adjustment	Approx. 70 to 100% of total resistance. (Adjustable by the front-accessible trimmer.)	

## Ranges Available

	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%

\* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.

Output Spec Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.

Output Spec Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.

## PERFORMANCE

Accuracy Rating	Better than $\pm 0.2\%$ of span. (at $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ )
Temperature Effect	Better than $\pm 0.2\%$ of span per $10^{\circ}\text{C}$ change in ambient.
Response Time	170ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	3-way isolation between input, output, and power.
Insulation Resistance	100M $\Omega$ min. (@ 500V DC) between input, output, and power.
Dielectric Strength	Input / Output / Power: 1500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: $-5$ to $55^{\circ}\text{C}$ Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	$-10$ to $60^{\circ}\text{C}$

## PHYSICAL

Installation	DIN rail mounting
Wiring	M3.5 screw terminal connection (with drop-out prevention screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended

External Dimensions	W25.0 $\times$ H94.0 $\times$ D40.0mm (including the DIN rail)
Weight	90g max.

## MATERIALS


Housing	ABS resin (UL 94V-0)
Screw Terminal	Nickel-plated steel
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Anti-Humidity Coating	HumiSeal <sup>®</sup> 1A27NS (Polyurethane)

\* HumiSeal<sup>®</sup> is a registered trademark of Chase Corporation.

## STANDARDS CONFORMITY

EC Directive	EMC Directive (2014/30/EU)
Conformity	EN61326-1: 2013

## TERMINAL ASSIGNMENT



①	N.C.
②	C
③	B
④	A
⑤	OUTPUT +
⑥	OUTPUT -
⑦	+ POWER
⑧	- POWER

## BLOCK DIAGRAM

