

DESCRIPTION

The MS3704 is a slim, plug-in high-level signal conditioner (isolator) that converts DC current or voltage signals into commonly used DC signals and provides isolated single or dual output.

ORDERING CODE

Model **MS3704** - -

Power Supply

A: 100 to 240V AC (50 to 60Hz)

D: 24V DC **P:** 100 to 240V DC

Input

A: 4 to 20mA DC

B: 2 to 10mA DC

C: 1 to 5mA DC

D: 0 to 20mA DC

E: 4 to 20mA DC *1

H: 10 to 50mA DC

Z: Other DC current signal

3: 0 to 1V DC

4: 0 to 10V DC

5: 0 to 5V DC

6: 1 to 5V DC

4W: ±10V DC

5W: ±5V DC

0: Other DC voltage signal

*1: Shunt resistor 50Ω

Output 1

A: 4 to 20mA DC

D: 0 to 20mA DC

Z: Other DC current signal

1: 0 to 10mV DC

2: 0 to 100mV DC

3: 0 to 1V DC

4: 0 to 10V DC

5: 0 to 5V DC

6: 1 to 5V DC

3W: ±1V DC

4W: ±10V DC

5W: ±5V DC

0: Other DC voltage signal

Output 2

No code: None

The codes are the same as for Output 1.

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.

Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.

Options

No code: None

/K: Fast response (0 to 90% response time: 10ms max.)


/L: Dual current output with high output load

* Not subject to CE approval.

(OUT-1: 750Ω / OUT-2: 550Ω)

/X: Others (Special order)

* For non-standard options, ask MTT for availability.

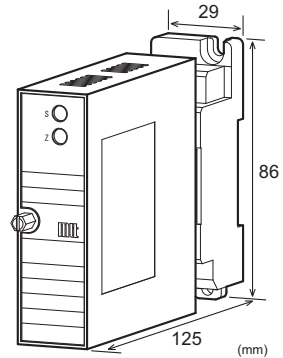
ORDERING INFORMATION

To place an order, please use the ordering code format as shown on the left.

(e.g.) MS3704-A-AA6

Other Ordering Examples:

For an input code of "Z": MS3704-A-ZAA (Input: 8 to 20mA)

For an output code of "0": MS3704-A-A60 (Output: 2 to 5V)

For an option code of "X": MS3704-A-66/X (0-90% response time: 5ms max.)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

SPECIFICATIONS
POWER SECTION

Power Requirements 100 to 240V AC: 85 to 264V AC (47 to 63Hz)

24V DC: 24V DC±10%

100 to 240V DC: 85 to 264V DC

Power Sensitivity Better than ±0.1% of span for each power supply range.

Power Line Fuse 160mA fuse is installed (standard).

Power Consumption

Power	100-240V AC	24V DC	100-240V DC
Single Output	4.0VA max	1.2W max	4.8W max
Dual Output	5.0VA max	1.6W max	6.0W max

INPUT SECTION
Input Resistance

Voltage Input (DC) With or without power: 1MΩ min.

Current Input (DC) 4 to 20mA (std.) 250Ω

2 to 10mA 250Ω

1 to 5mA 100Ω

0 to 20mA 250Ω

10 to 50mA 10Ω

Allowable Input Voltage

Voltage Input Model 30V DC max., continuous. (Standard for a span up to 10V)

Current Input Model 40mA DC max., continuous.

(Standard for 4 to 20mA)

Ranges Available		
	Current Signal	Voltage Signal
Input Range (DC)	-100 to 100mA	-300 to 300V
Input Span (DC)	100 μ A ^{*1} to 200mA	200mV ^{*2} to 600V
Input Bias	-100 to 100%	-100 to 100%

Note: For any input range including negative input signals, the input spans for current and voltage signals range from ^(*)200 μ A to 200mA and ^(*)400mV to 600V, respectively.

Input Spec. Ex. 1: For 3 to 8V input, the input span is 5V and the bias +60%.

Input Spec. Ex. 2: For -5 to 0V input, the input span is 5V and the bias -100%.

● OUTPUT SECTION		
Maximum Output Load		
Voltage Output (DC)	1V span and up	2mA max.
	10mV	10k Ω min.
	100mV	100k Ω min.
Current Output (DC)	4-20mA single output	750 Ω max.
	4-20mA dual output	Output 1: 550 Ω max. Output 2: 350 Ω max.
Zero Adjustment	Approx. \pm 5% of span. (Adjustable by the front-accessible trimmer.)	
Span Adjustment	Approx. \pm 5% of span. (Adjustable by the front-accessible trimmer.)	

Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%

* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.

Output Spec. Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.

Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.

● PERFORMANCE	
Accuracy Rating	Better than \pm 0.1% of span (at 25°C \pm 5°C).
Temperature Effect	Better than \pm 0.2% of span per 10°C change in ambient.
Response Time	85ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output [Output 1/Output 2], power, and ground.
Insulation Resistance	100M Ω min. (@ 500V DC) between input, output [Output 1/Output 2], and power.
Dielectric Strength	Input / Output [Output 1/Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.

Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C


● PHYSICAL	
Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-out prevention screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 x H86 x D125mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

● MATERIALS	
Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2 μ m gold plating
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Anti-Humidity Coating	HumiSeal [®] 1A27NS (Polyurethane)

* HumiSeal[®] is a registered trademark of Chase Corporation.

● STANDARDS CONFORMITY	
CE Directive Conformity	EMC Directive (2014/30/EU) EN61326-1: 2013 Low Voltage Directive (2014/35/EU) IEC61010-1/EN61010-1: 2010 Installation Category II Pollution Degree 2 Maximum operating voltage 300V Reinforced insulation between [input/output/GND] and power.

TERMINAL ASSIGNMENT

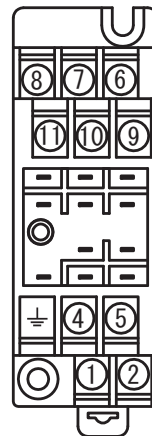

①	P (+)	POWER
②	N (-)	
⊥	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	+ INPUT	
⑩	- INPUT	
⑪	N.C.	

BLOCK DIAGRAM

